

CDR5E D14.0 M

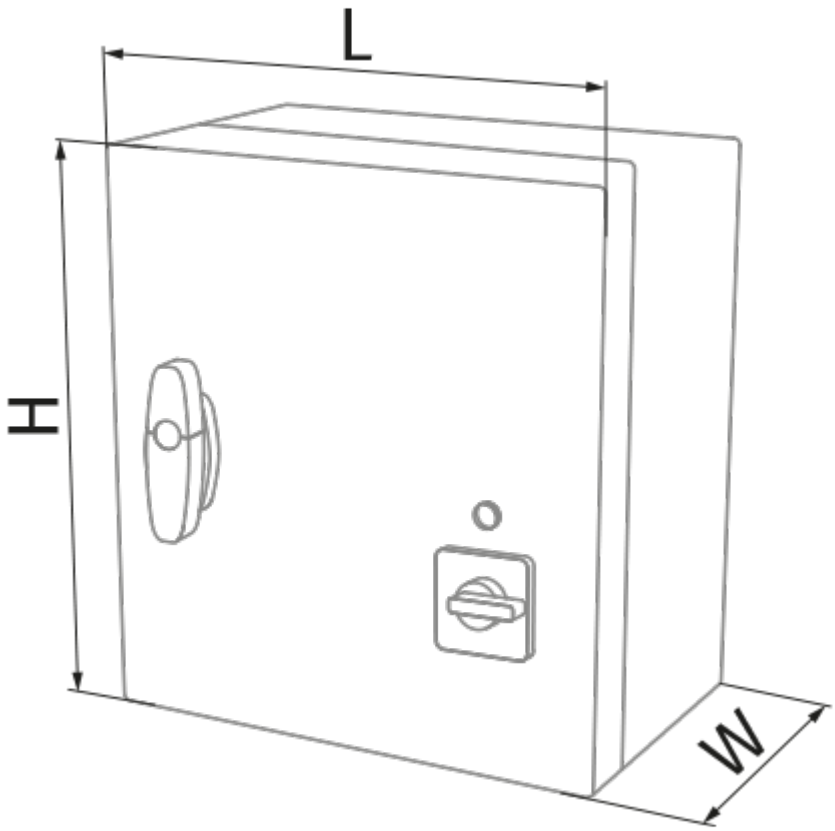
Three phase speed controller

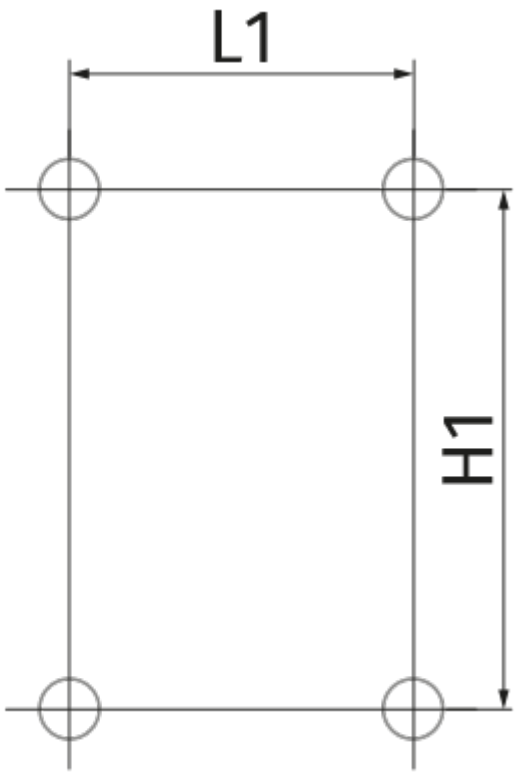
- Casing material: Coated steel

	Unit of measurement	CDR5E D14.0 M
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Unit current	A	14
Weight	kg	43
Ambient air temperature min	°C	5
Ambient air temperature max	°C	35
Ingress protection rating	-	IP44

Dimensions

L	H	W	L1	H1
400	430	235	355	355


L
H
W


L1
H1