

CDR5E D8.0 M

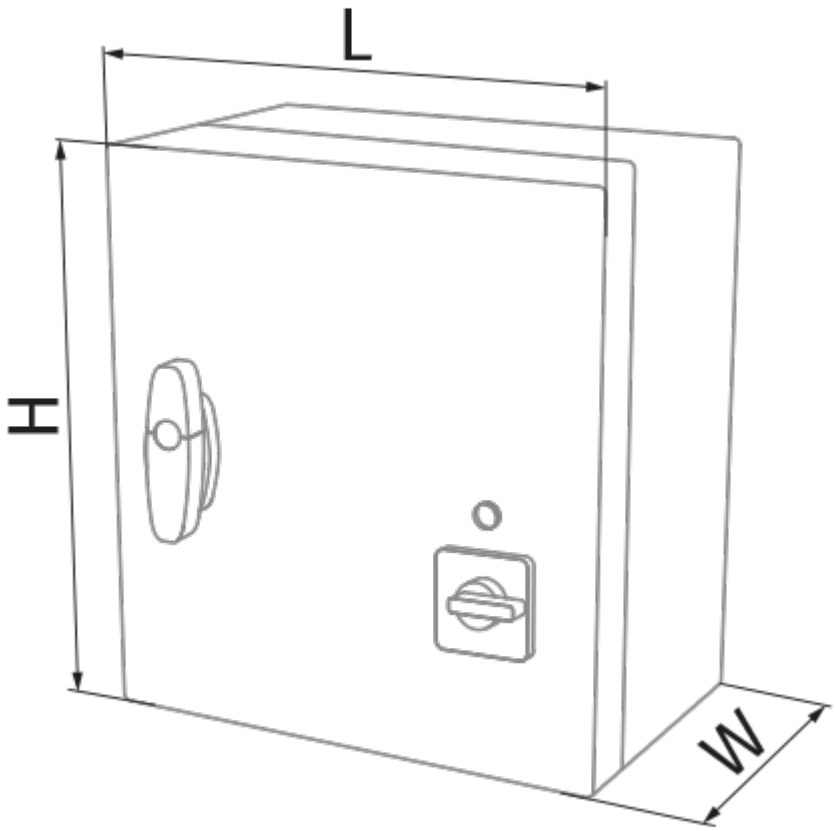
Three phase speed controller

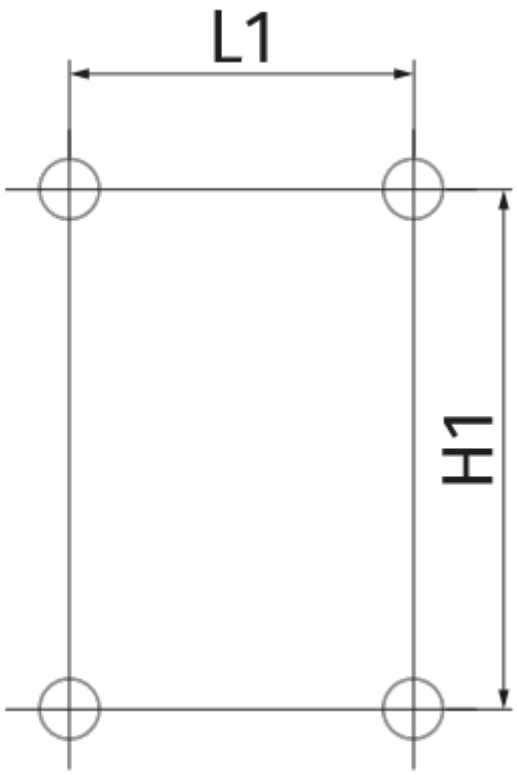
- Casing material: Coated steel

	Unit of measurement	CDR5E D8.0 M
Phases	-	3
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50/60
Unit current	A	8
Weight	kg	27.2
Ambient air temperature min	°C	-20
Ambient air temperature max	°C	35
Ingress protection rating	-	IP54

Dimensions

L	H	W	L1	H1
300	425	235	255	355


L
H
W


L1
H1