

MERENFORT DTF 38L/350-ARI-2.0

Bidirectional flow central fresh air dehumidifier

- Supply filter: silver ions + HEPA
- Extract filter: silver ions + G3
- Sound-insulated casing
- Control: Wired control panel
- Humidity sensor
- CO2 sensor
- PM2.5 sensor
- Temperature sensor

	Unit of measurement	MERENFORT DTF 38L/350-ARI-2.0
Maximum supply voltage	V	220
Minimum supply voltage	V	220
Power supply frequency	Hz	50
Rated power	W	390
Maximum airflow	m^3/h	350
Sound pressure level LpA at 1,5 m	dB(A)	34
Heat recovery efficiency, max	%	60
Weight	kg	92
Supply filter	-	silver ions + HEPA
Extract filter	-	silver ions + G3
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	1

Dimensions

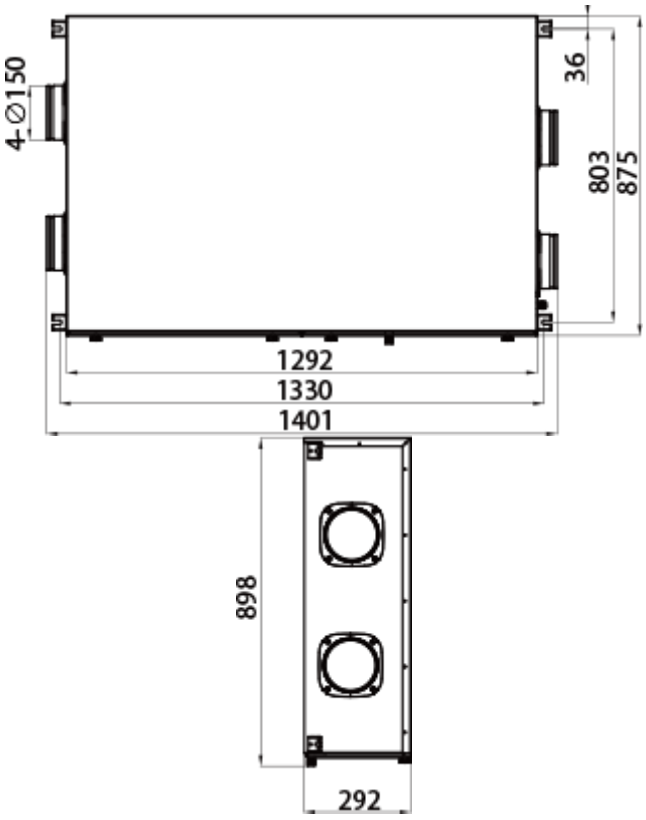
4-Ø150
36
803
875
1292
1330
1401
898
292